


## Pipe Poles -Ø140 Range

PP-140-4.5 -- Rev.1




PRODUCT ID PP-140-4.5


Ø140 O/D PIPE POLE.
POLE HOT DIP GALVANISED
AFTER FABRICATION. (OPTIONAL DUAL COAT POWDERCOAT)

POLE DOORS SUPPLIED WITH 300x90mm GEAR TRAY FOR MOUNTING ELECTRICAL EQUIPMENT

4.5m NOMINAL POLE HEIGHT





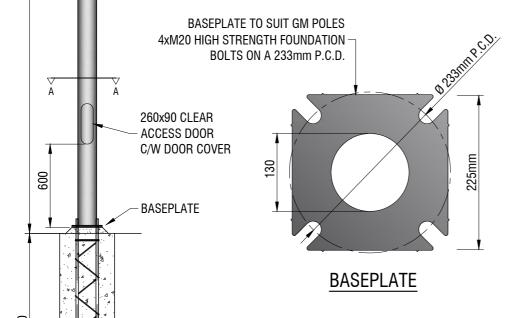


FOUNDATION CAGE CAST INTO

32 MPa CONCRETE FOOTING IN

SOIL WITH A 150 kPa MINIMUM

BEARING CAPACITY.



## DOOR DETAIL

## NOTES

- 1. Poles are to be assembled and erected in accordance with GM Poles instructions by suitably qualified personnel. Contact GM Poles to take advantage of our installation service;

  2. Footing guides based on assumed soil conditions (provided for cost estimate purposes) are available
- Footing guides based on assumed soil conditions (provided for cost estimate purposes) are available prior to placing an order. Contact GM Poles for certified footing designs to suit actual soil conditions;
- **3.** Poles can be supplied with either a complete foundation cage, ready to place in an excavated footing or foundation bolts to be tied into a foundation cage supplied by others;
- **4.** Footings must be constructed in accordance with Australian standards and GM Poles procedures. Contact GM Poles to take advantage of our footing installation service;

1800 GM POLES GMPOLES.COM.AU

Ø450

QUALITY // SERVICE // INNOVATION
SALES@GMPOLES.COM.AU