
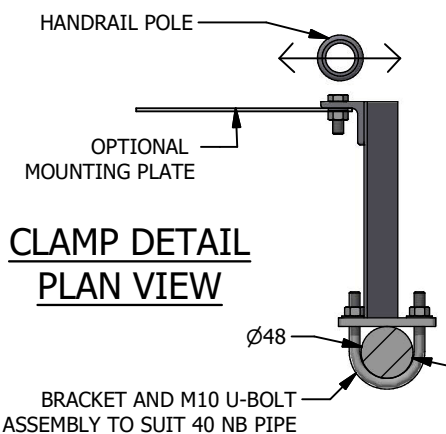



STANDARD 2.4m NOMINAL  
MOUNTING HEIGHT  
OPTIONAL 2.7m & 3.0m.


BI-DIRECTIONAL LOWERING  
ACTION LEFT OR RIGHT  
HAND SWING.

OUTREACH RESTS ON  
HAND RAIL DURING  
MAINTENANCE  
OPERATIONS

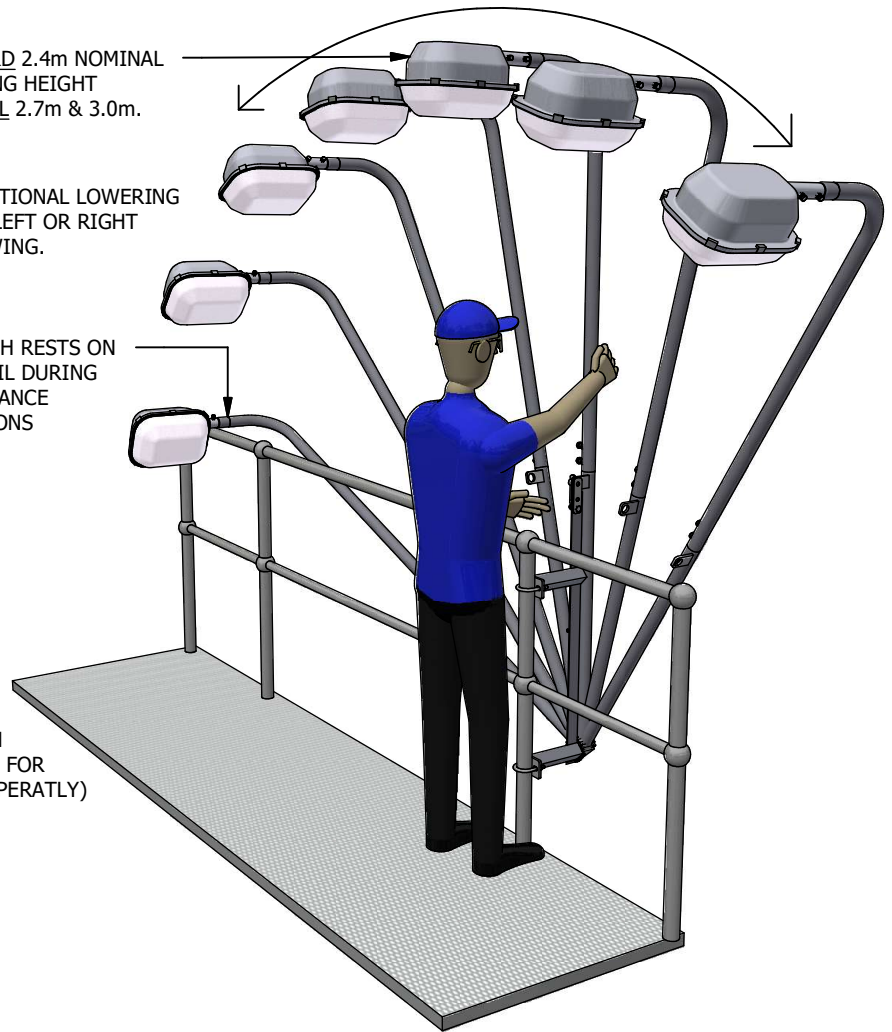


## DOUBLE HANDRAIL POLE

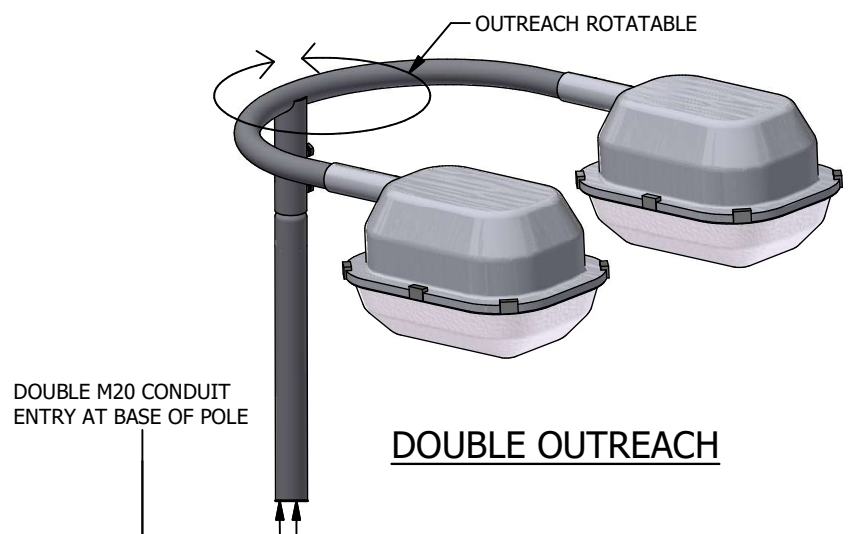


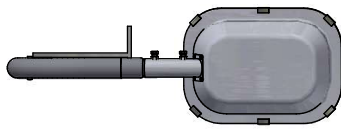

PLAN VIEW SINGLE


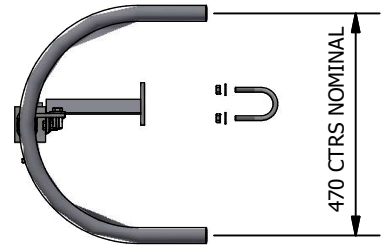


PLAN VIEW DOUBLE

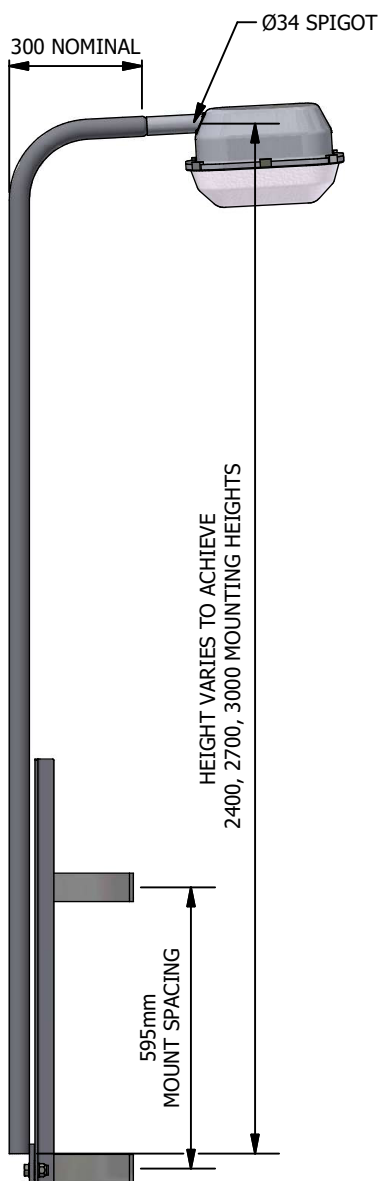

SINGLE HANDRAIL POLE

COMPONENT BASED DESIGN  
PROVIDES FOR EASY INSTALLATION  
AND MODIFICATION (SINGLE  
TO DOUBLE IN THE FUTURE)

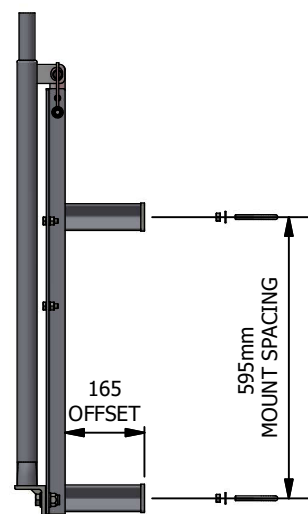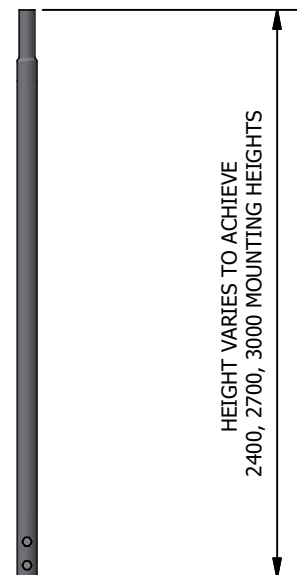

DOUBLE HANDRAIL POLE

STANDARD OFFSET AND MOUNT  
SPACINGS ARE SHOWN. PROJECT  
SPECIFIC OFFSET & MOUNT SPACINGS  
ARE AVAILABLE. ENQUIRE GM POLES  
FOR MORE DETAILS.